


DECORATIVE LIGHT


power	size(mm)	lumen	voltage	IP	beam angel
1 Watt	Sqr (60°* w60°* h30)	90	85-265	65	45
2 Watt	Sqr (60°* w60°* h30)	180	85-265	65	45
4 Watt	Sqr (80°* w80°* h30)	360	85-265	65	45
4 Watt	Rec (1190°* w60°* h30)	360	85-265	65	45
8 Watt	Rec (1190°* w60°* h30)	720	85-265	65	45



1 Watt (1*1- Square)
2 Watt (2*1- Square)

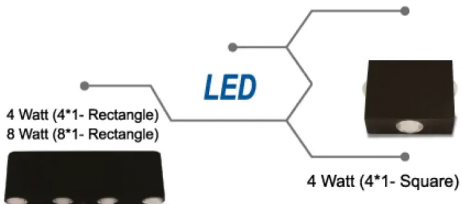

JET LIGHT



power	lumen	voltage	IP	beam angel
3 Watt	270	85-265	65	40
5 Watt	450	85-265	65	40
10 Watt	900	85-265	65	40

CANDLE LIGHT



power	lumen	voltage	IP	beam angel
8 Watt	750	180-240	20	160




WALL LIGHT




power	lumen	voltage	IP	beam angel
20 Watt	1600	185-265	65	160

HALOGEN LIGHT



Model	power	lumen	voltage	IP	beam angel
MR16	7 Watt	650	185-265	20	120
GU10	7 Watt	650	185-265	20	120

TRAIN DECORATIVE LIGHT

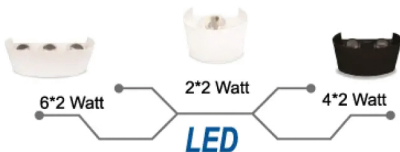

power	lumen	voltage	IP	beam angel
4Watt	360	85-265	65	45
8Watt	720	85-265	65	45
12Watt	1060	85-265	65	45




power	lumen	voltage	IP	beam angel
16Watt	1440	85-265	65	45
20Watt	1800	85-265	65	45
24Watt	2160	85-265	65	45



power	lumen	voltage	IP	beam angel
9Watt	810	85-265	65	45
18Watt	1620	85-265	65	45
27Watt	2430	85-265	65	45

DOWN LIGHT

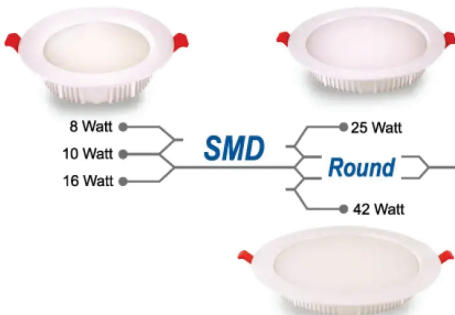

power	size(mm)	cut 	lumen	voltage	IP	beam angel
8 Watt	110*h30	80	720	220-240	20	160
10 Watt	110*h30	80	900	220-240	20	160
16 Watt	120*h30	100	1440	220-240	20	160
25 Watt	170*h30	140	2250	220-240	20	160
42 Watt	230*h30	200	3360	220-240	20	160



DOWN LIGHT




power	size(mm)	cut 	lumen	voltage	IP	beam angel
20 Watt	175*h90	150	1800	180-240	20	120
35 Watt	220*h60	200	3150	180-240	20	120
60 Watt	230*h120	190	6000	180-240	20	120
80 Watt	230*h120	190	7200	180-240	20	120

TRACK LIGHT



Model	power	lumen	voltage	IP	beam angel
TL3230	30	2700	180-240	20	90
TL3231	30	2700	180-240	20	60
TL3232	30	2700	180-240	20	60



FLOOD LIGHT

100 Watt



SMD


50 Watt




200 Watt



power	size(mm)	lumen	voltage	IP	beam angel
50 Watt	220* w160* h30	4500	220-240	65	160
100 Watt	270* w210* h30	9500	220-240	65	160
200 Watt	370* w270* h30	18500	220-240	65	160

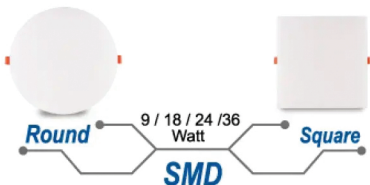


power	size(mm)	cut $\downarrow$	lumen	voltage	IP	beam angel
9 Watt	Rnd (100* h25)	40-90	720	220-240	20	180
9 Watt	Sqr (1100* w100* h25)	40-90	720	220-240	20	180
18 Watt	Rnd (120* h25)	40-110	1440	220-240	20	180
18 Watt	Sqr (1120* w120* h25)	40-110	1440	220-240	20	180
24 Watt	Rnd (170* h25)	40-160	1920	220-240	20	180
24 Watt	Sqr (1170* w170* h25)	40-160	1920	220-240	20	180
36 Watt	Rnd (225* h45)	40-210	2880	220-240	20	180
36 Watt	Sqr (1225* w224* h45)	40-210	2880	220-240	20	180

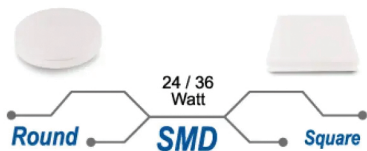

power	size(mm)	lumen	voltage	IP	beam angel
24 Watt	Rnd(170* h30)	1920	220-240	20	180
24 Watt	Sqr (1170* w170* h45)	1920	220-240	20	180
36 Watt	Rnd(225* h45)	2880	220-240	20	180
36 Watt	Sqr (1225* w224* h45)	2880	220-240	20	180

WALL WASHER LIGHT

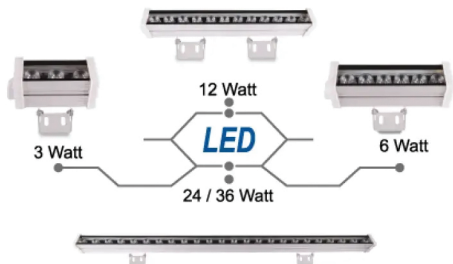

power	size(mm)	lumen	voltage	IP	beam angel
3 Watt	1105* w45* h55	270	185-265	65	160
6 Watt	1170* w45* h55	540	185-265	65	160
12 Watt	1370* w45* h55	1080	185-265	65	160
24 Watt	17000* w45* h55	2160	185-265	65	160
36 Watt	17000* w45* h55	3240	185-265	65	160

BRACKET LIGHT



power	size(mm)	lumen	voltage	IP	beam angel
40 Watt	1470* w65* h40	3600	220-240	40	160
45 Watt	1590* w65* h40	4050	220-240	40	160
50 Watt	1670* w65* h40	4500	220-240	40	160
60 Watt	1670* w65* h40	5400	220-240	40	160
70 Watt	1880* w65* h40	6300	220-240	40	160
90 Watt	17140* w65* h40	8100	220-240	40	160
110 Watt	17140* w65* h40	9900	220-240	40	160